


## TSX



- Equipped with a large battery operated suction cup, with a mousse sealing ring for maximum grip.
- Equipped with vacuum gauge and a non-return valve.
- Provided with two (2) large wheels (10"), suitable for use on rough surfaces. Made of solid rubber (anti-puncture)
- Two protective tilting plates prevents the sutcion cup from resting on surfaces that could potentially damage or dirty surface.

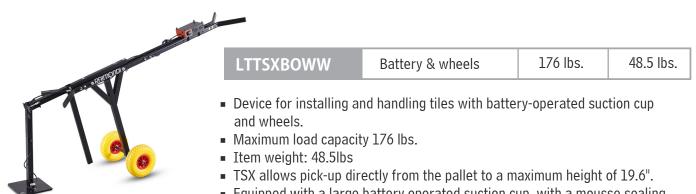

**USE WITH CART** 

TSX can be used with its cart to allow one-person usage. With two large wheels 10-inches in diameter made of solid rubber perfect for going over rough surfaces.



WHEELS

Two solid-rubber large wheels, 10" in diameter for maneuvering on rough surfaces. The wheels are anti-puncture.



BATTERY

Comes with a li-ion rechargeable battery-operated device to generate vacuum.



## TSS



11.2 lbs.

- Device for installing and handling tiles with vacuum (pump) suction cup.
- Designed for use with tiles of maximum weight of 110lbs.
- One-man configuration: maximum tile size 24" x 24" (60 x 60 cm) Two-men configuration: maximum tile size 48" x 48" (120 x 120cm)
- Provided with pump suction cup Ø6.875"
- Maximum load capacity 110 lbs.
- Item weight: 11.2lbs

LTTSSH

- Triple-lip stain-free rubber. Replaceable rubber cup, and vacuum gauge.
- The pump-operated suction cup is designed for handling ceramic tiles, smooth or textured. The suction cup is also suitable for any non-porous materials.
- Maximum nominal suction cup load capacity 287lbs. (130kg). Product not recommended for tile heavier than 110lbs (50kg).











