







BOLT 120

WS120BOLT

- Cuts porcelain, single-double fired, marble granite.
- Plunge cut and adjustable cutting depth.
- Maximum depth of cut 45mm in single pass.
- Maximum depth of cut 60mm in double-pass.
- Heavy duty water pump.
- Two (2) jet nozzles.
- Easy-to-remove aluminum work bench.
- Tilting movement for 45° angle cut (jolly).
- Polypropylene pulleys (4); each reinforced with two inside bearings.
- Motor held up by galvanized metal frame.
- Direct drive 1.5hp motor.
- 110 Volt. capacity.
- Sliding bars and pivots in aluminum.
- Reinforced internal bearings.
- Coated metal frame.
- Adjustable aluminum square.
- Folding legs.
- Compatible with 10" diamond blade.

CUTTING THICKNESS	MITER THICKNESS	CUTTING LENGTH	CUTTING WIDTH	DIAGONAL CUT	DIMENSIONS	UNIT NET WEIGHT
55mm	30mm	120cm	∞	85 x 85 cm	150 x 56xh 50cm	50kg
2 1/8"	1 3/16"	47 1/4"		33 1/2" x 33 1/2"	59" x 22" xh 19 5/8"	110.2 lbs.


BOLT SERIES

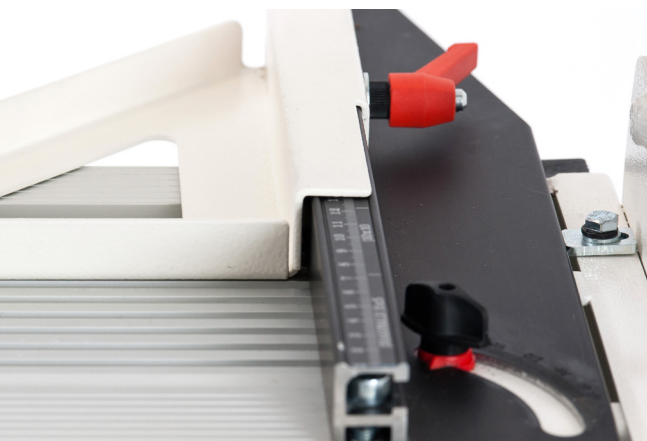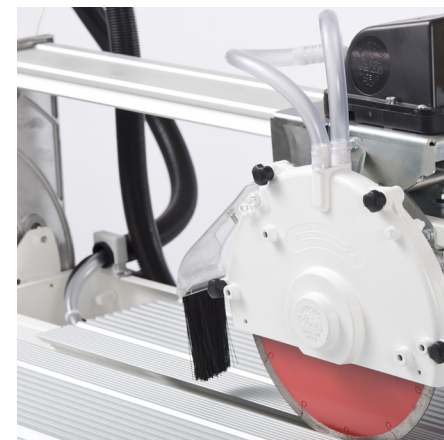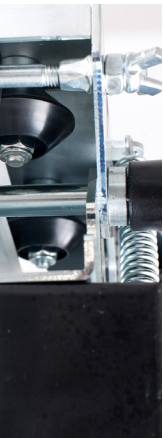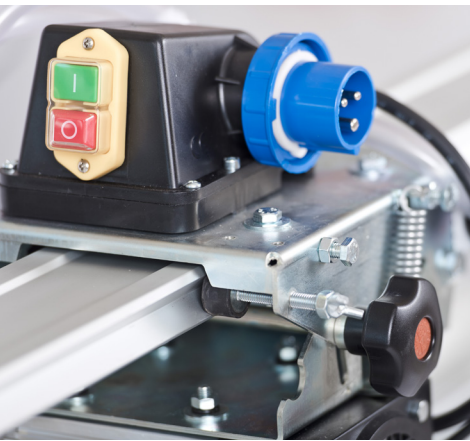

BOLT SERIES



ACCESSORIES



DSRDBC

Red brick dressing stone used for all diamond blades.
45 x 230 x h 25 mm
1.75" x 9" x h 1"



WSKITW

Optional wheel kit for easy transport. Four wheels and two handles.



WSBROLL

Side roller bench. Free-standing 28" x 20" work area with five rollers. Adjustable legs.



WSESS

Extension side square 16" in length use on **WSBROLL**.



WSSQ9045LEFT

Sliding square for 45° and 90° angles.



WSSQ9045

Sliding square for 45° and 90° angles.



WSSQ90

Sliding square for 90° angles.



WSMSQN

Easy to install and use side square. Install on right side of machine.