

# SCREEDING

## VSMSB

- For screeding mortar base (dry pack) or sand.
- Two (2) vibration speeds of 8,200 / 9,800 rounds per minute.

**Includes:** 110/42 transformer  
 Two aluminum bars 70" & 83" long.  
 Two steel shims 78" in length.  
 Mortar spreader with aluminum handle.

### TRANSFORMER

### BARS LENGTH


### UNIT NET WEIGHT

110vlt. to 42 vlt.

71" - 82<sup>5</sup>/<sub>8</sub>"

25.6 lbs.  
56.4 kg

**VIBRATE**

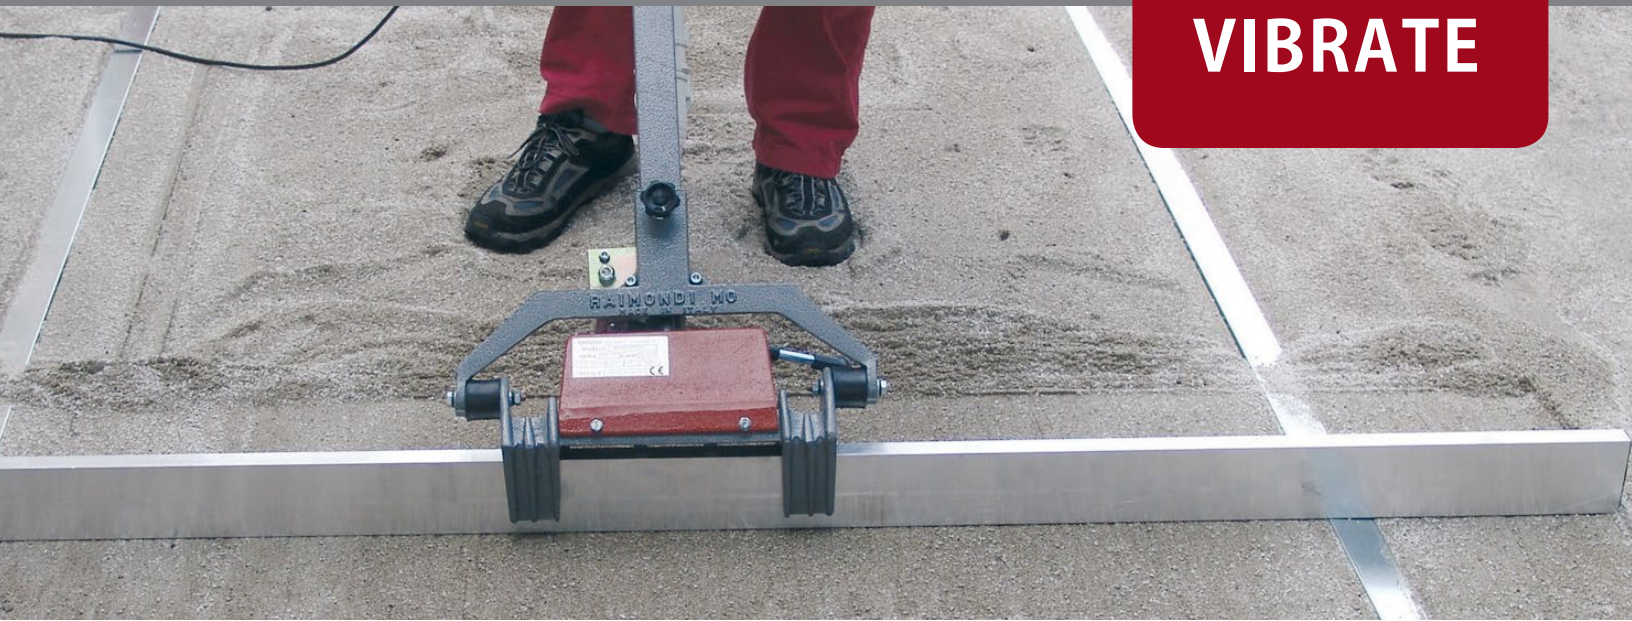

## ACCESSORIES



### **VSPASQ**

Tempered steel mortar spreader  
for screeding set. Optional  
aluminum handle (**WSPOLE52**)

