

CLIPS



LSVITECAP100
LSVITECAP300
LSVITECAP900

- Bags of 100.
- Bag of 300.
- Bag of 900.
- Twist cap onto clip until grip point.
- Ergonomic finger grip for twisting cap on.
- Hollow cap design enables joint visibility.
- Cap works on every clip.



LSVITECLIP100
LSVITECLIP300
LSVITECLIP3000

- Bags of 100.
- Bags of 300.
- Bags of 3,000.
- $\frac{1}{32}$ " (1mm) joint size
- $\frac{1}{8}$ " (2.5mm) to $\frac{5}{8}$ " (13mm) tile thickness.



LSVITECLH100
LSVITECLH300
LSVITECLH2500

- Bags of 100.
- Bags of 300.
- Bags of 2,500.
- Large VITE clip.
- $\frac{1}{32}$ " (1mm) joint size
- $\frac{1}{8}$ " (2.5mm) to $\frac{1}{2}$ " (13mm) tile thickness.

1/16"



LSVITE116CL100
LSVITE116CL300
LSVITE116CL3000

- Bags of 100.
- Bags of 300.
- Bags of 3,000.
- 1/16" (1.5mm) joint size
- 1/8" (2.5mm) to 5/8" (13mm) tile thickness.



LSVITE116CLT100
LSVITE116CLT300

- Bags of 100.
- Bags of 300.
- 1/16" (1.5mm) joint size
- 1/8" (2.5mm) to 5/8" (13mm) tile thickness.
- T-shape installation configuration.



LSVITE116CLX100
LSVITE116CLX300

- Bags of 100.
- Bags of 300.
- 1/16" (1.5mm) joint size
- 1/8" (2.5mm) to 5/8" (13mm) tile thickness.
- CROSS-shape installation configuration.

1/8"



LSVITE18CL100
LSVITE18CL300
LSVITE18CL3000

- Bags of 100.
- Bags of 300.
- Bags of 3,000.
- 1/8" (3mm) joint size
- 1/8" (2.5mm) to 5/8" (13mm) tile thickness.



LSVITE18CLX100
LSVITE18CLX300

- Bags of 100.
- Bags of 300.
- 1/8" (3mm) joint size
- 1/8" (2.5mm) to 5/8" (13mm) tile thickness.
- T-shape installation configuration.



LSVITE18CLT100
LSVITE18CLT300

- Bags of 100.
- Bags of 300.
- 1/8" (3mm) joint size
- 1/8" (2.5mm) to 5/8" (13mm) tile thickness.
- CROSS-shape installation configuration.

ACCESSORIES



LSVITEWR

- Washer ring for R.L.S VITE cap.
- Scratch preventing protection.
- Prevents any scratch or strain on tile during installation.
- Add the washer to the cap before twisting onto clip.



LSVITEXPRESS


- R.L.S. VITE accessory for cap installation.
- Use the XPRESS with an electric drill.
- The XPRESS makes for quick installation of the R.L.S. VITE.
- Screw the R.L.S. VITE caps onto clip using the XPRESS with a consistent tightening torque set via the clutch adjustment forlippage correction.
- Unscrew the cap from the clip by reversing rotation of the drill.



CONSUMPTION


Consumption charts for regular R.L.S. clips.

VITE X and REGULAR LAYOUT

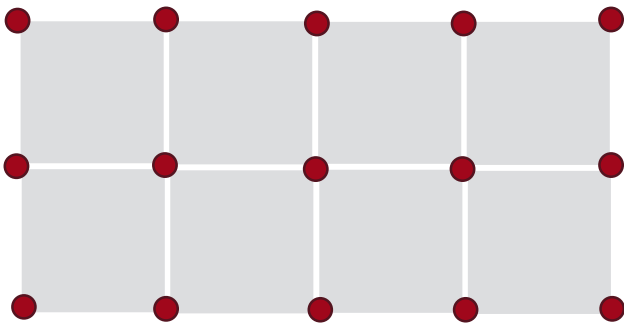

Cross section layout attained with the Cross VITE clips.
Example of 12" x 12" tile using 140 clips for 100 sq.ft.

VITE X and REGULAR LAYOUT

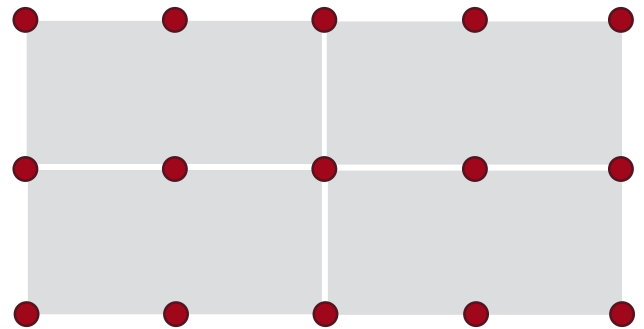

Cross section layout attained with the Cross VITE clips.
Example of 12" x 24" tile using 98 clips for 100 sq.ft.

SQUARE TILE

TILE SIZE (inches)	VITE CLIP per 100 sqft. including intersections
8" x 8"	224 clips
12" x 12"	140 clips
16" x 16"	186 clips
24" x 24"	72 clips
36" x 36"	52 clips
40" x 40"	41 clips
48" x 48"	40 clips
59" x 59"	32 clips

RECTANGULAR TILE

TILE SIZE (inches)	VITE CLIP per 100 sqft. including intersections
12" x 16"	148 clips
4" x 24"	297 clips
6" x 24"	197 clips
8" x 24"	148 clips
12" x 24"	98 clips
16" x 24"	109 clips
8" x 32"	166 clips
16" x 32"	109 clips
71" x 32"	46 clips
6" x 48"	198 clips
8" x 24"	148 clips
12" x 48"	98 clips
12" x 16"	59 clips