





## BOLT 90

### WS90BOLT

- Cuts porcelain, single-double fired, marble granite.
- Plunge cut and adjustable cutting depth.
- Maximum depth of cut 45mm in single pass.
- Maximum depth of cut 60mm in double-pass.
- Heavy duty water pump.
- Two (2) jet nozzles.
- Easy-to-remove aluminum work bench.
- Tilting movement for 45° angle cut (jolly).
- Polypropylene pulleys (4); each reinforced with two inside bearings.
- Motor held up by galvanized metal frame.
- Direct drive 1.5hp motor.
- 110 Volt. capacity.
- Sliding bars and pivots in aluminum.
- Reinforced internal bearings.
- Coated metal frame.
- Adjustable aluminum square.
- Folding legs.
- Compatible with 10" diamond blade.

CUTTING THICKNESS	MITER THICKNESS	CUTTING LENGTH	CUTTING WIDTH	DIAGONAL CUT	DIMENSIONS	UNIT NET WEIGHT
55mm	30mm	90cm	∞	63 x 63 cm	120 x 56xh 50cm	46kg
2 1/8 "	1 3/16"	35 1/2"		25" x 25"	47 1/4" x 22" xh 19 5/8"	101.4 lbs.


# BOLT SERIES

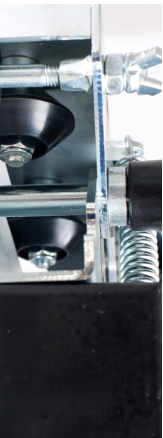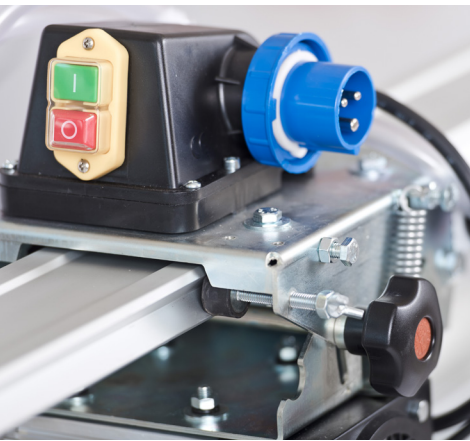

# BOLT SERIES



## ACCESSORIES



### DSRDBC

Red brick dressing stone used for all diamond blades.  
45 x 230 x h 25 mm  
1.75" x 9" x h 1"



### WSKITW

Optional wheel kit for easy transport. Four wheels and two handles.



### WSBROLL

Side roller bench. Free-standing 28" x 20" work area with five rollers. Adjustable legs.



### WSESS

Extension side square 16" in length use on **WSBROLL**.



### WSSQ9045LEFT

Sliding square for 45° and 90° angles.



### WSSQ9045

Sliding square for 45° and 90° angles.



### WSSQ90

Sliding square for 90° angles.



### WSMSQN

Easy to install and use side square. Install on right side of machine.